

# Square 12

## Good Acoustic Plaster Solution

### Description

Traditional Scandinavian design with plaster square holes with a diameter of 12mm. Product can withstand shock 12x12mm. Product is light, maintain, and can overmales. The product has therefore long durability and a very good total economy.

### Colour and light reflexion

The nearest color code is NCS 0500.  
Light reflection is 85%.





### Installation

Disc is installed in himlings system Tight24.


### Edge Type

Edge A and E.

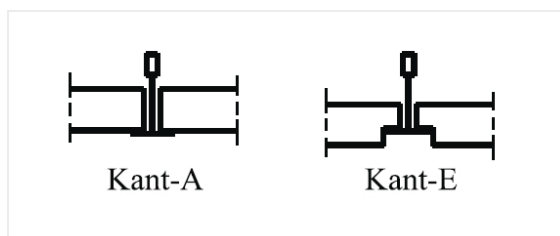

### Acoustic

Absorbsion test is performed/pages ISO 354.  
Ceiling disc is classified as class C,  
and absorpsion coefficient is intended to be w 0.75/pages, ISO 11654.  
The desired level is 20%.

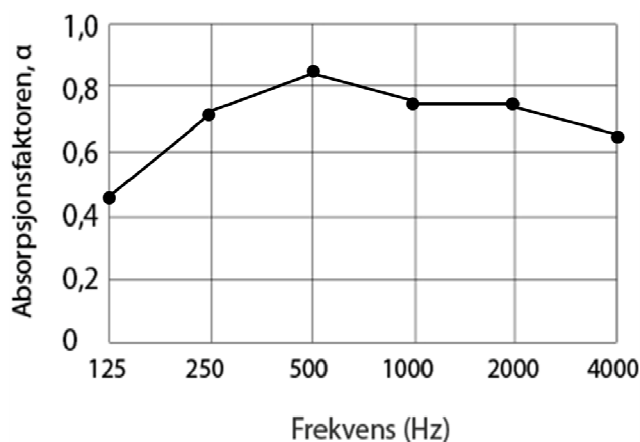

### Fire Class

A2-s1,d0, in accordance with EN 13823.

### Moisture Resistant Device

By constant relative humidity 90% at 40 °C to a maximum deformity be 0, 9 mm.

### Dimension and weight

15mmx600x600

15mmx600x1200

Panels weight is 5,9 kg/m<sup>2</sup>

Sist oppdatert  
27.10.2011 22:46